

Giciye Tile Grout shine sabon samfuri don kayan ado na gida, wanda gaba ɗaya maimakon wakilin dinki. A lokaci guda, hujja ce ta molt, hujja ta danshi, dandano na muhalli, mara guba da kuma dandano mai kanshi, kara boyayyen iskar overgen ion don tsarkake iska. Mafi mahimmanci, ba tare da an fallasa shi ga babban girman hasken rana ba, samfuri bazai zama rawaya ba, mai sauƙin tsaftace datti.

Babban sinadaran	Epoxy guduro, high-karshen launi foda
Aiki	Cika da kyau na tile rap
Rayuwar shiryayye	Jari a cikin wuri mai sanyi da bushe a 0-37 °C na watanni 12
Cikakken nauyi	400 ml
Shiryawa	30 sit / katun


Ana iya amfani da shi mafi kyau a cikin gidajen tayal, dutse, gilashi, bene na Mosaic akan bango ko bene a gidan wanka, dafa abinci, ɗakin gida da sauransu. Yana da manyan nau'ikan launi, luster mai haske da kuma farfajiya yana da haske kamar yadda ake amfani da shi bayan ciring. Yana da [Kelin m grout Adadin strlesaler.](#)



Irin launuka na launuka don zaɓinku. Hakanan samar da launuka na musamman.



Samar da cikakkiyar hanyar daki

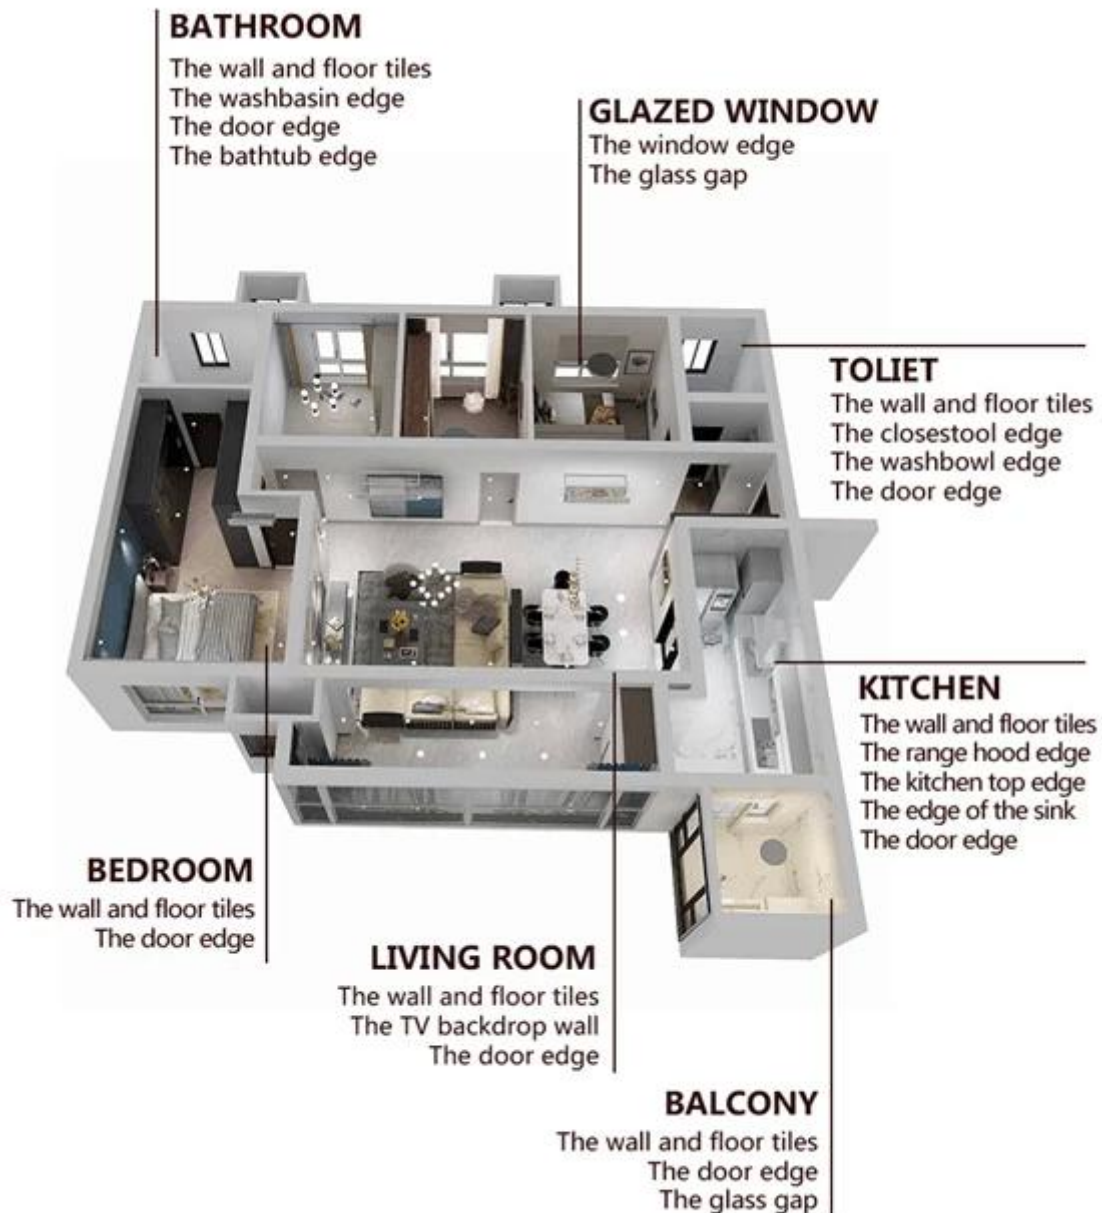

Brief aikin gini



Tsaftace fale-falen buraka kuma ci gaba da bushe.



Yaren mutanen Poland tare da kakin zuma na tie sai dai da glazed tayal.



Bude & agonch, bangarorin biyu za su iyakarfe, sa a kan babbar lalata da ake ciki.



Dunkule a kan bututun karfe, sa a kan babbar bindiga.



Karkatar da suddar saman bututun karfe a cikin 45 °.



Matsi na agogon 60-80cm mai tsawo a cikin rokon.



A koda a matse fitar da wakilin tilla tare da rata.



Latsa mafi girma tare da kayan aikin glue-latsa kayan aikin.




Don taɓawa a cikin 4-5 hours kuma cire wuce haddi ko wuce haddi.




Rike fale-falen buraka bushe a cikin awanni 24.

Kayan aiki mai ɗorewa

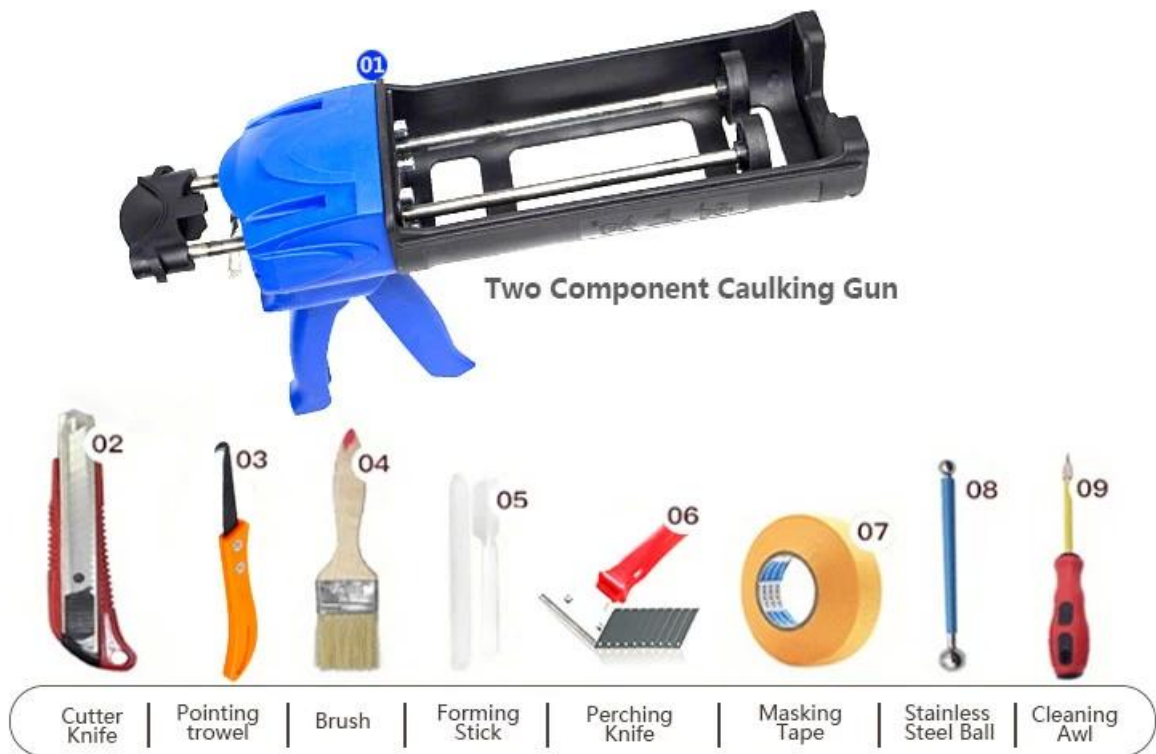

Amfani da Kamfanin

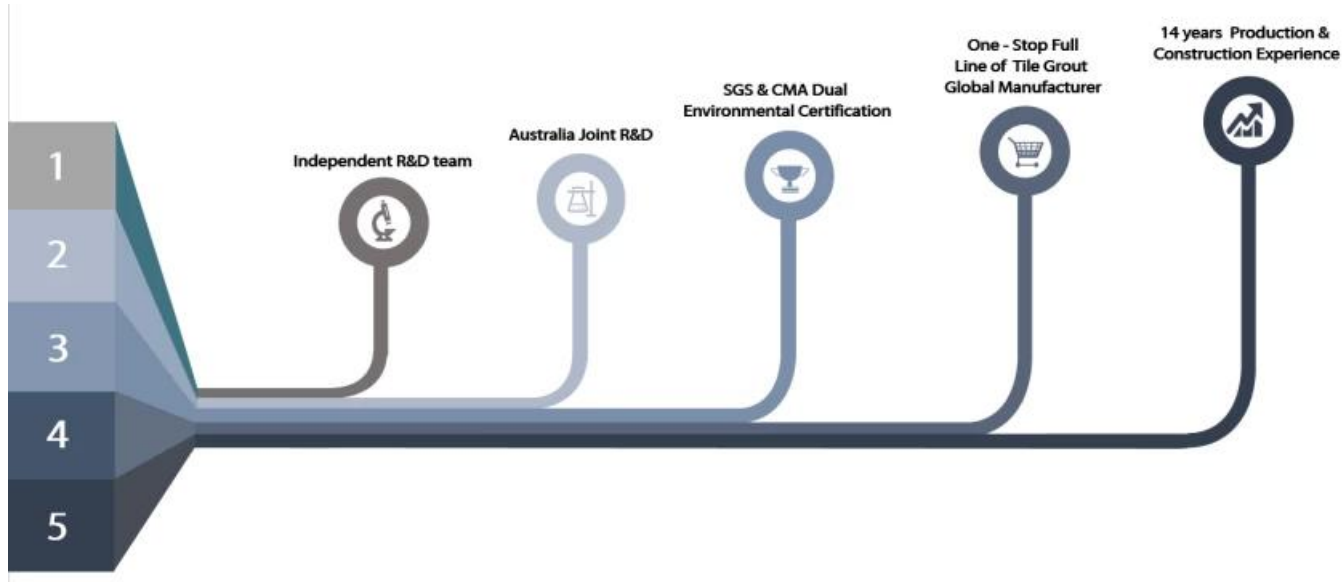

Fastocin masana\anta



Layin injin cream



Injin gwaji



Bayanin sarrafa batutuwa



Sanyi mai sanyaya



Cika layin injin



Mashin mai rufi



Kayan Kayan Kayan Kayan
Gaskiya



Stock

Ba da takardar shaida

