

Giciye Tile Grout shine sabon samfuri don kayan ado na gida, wanda gaba d'aya maimakon wakilin dinki. Ana iya amfani da shi mafi kyau a cikin gidajen tayal, dutse, gilashi, bene na Mosaic akan bango ko bene a gidan wanka, dafa abinci, dakin gida da sauransu. Yana da manyan nau'ikan launi, luster mai haske da kuma farfajiya yana da haske kamar yadda ake amfani da shi bayan ciring. A lokaci guda, hujja ce ta molt, hujja ta danshi, dandano na muhalli, mara guba da kuma dandano mai kanshi, kara boyayyen iskar overgen ion don tsarkake iska. Mafi mahimmanci, ba tare da an fallasa shi ga babban girman hasken rana ba, samfurin bazai zama rawaya ba, mai sau'kin tsaftace datti. Kelin-wani ingantaccen ginin giyar ginin, maraba domin tuntubar mu.



Irin launuka na launuka don zabinku. Hakanan samar da launuka na musamman.



Samar da cikakkiyar hanyar daki



Brief aikin gini



Clean the tiles and
keep it dry



Polish with tile wax
except the glazed
tile



Open & Watch, both
sides can extruded
meanwhile




Screw on the nozzle,
put on the grout
gun



Inclined cut the top
of the nozzle in 45°



Squeeze out
60-80cm long grout
in the forepart



Evenly squeeze out
the tile agent along
the gap



Press the grout with
professional
glue-press tools



Don't touch in 4-5
hours and remove
excess grout then.



Keep the tiles dry in
24 hours

Kayan aikin karfafa gwiwa



Two Component Caulking Gun



Cutter
Knife




Pointing
trowel



Brush



Forming
Stick



Perching
Knife



Masking
Tape




Stainless
Steel Ball



Cleaning
Awl

Amfani da Kamfanin

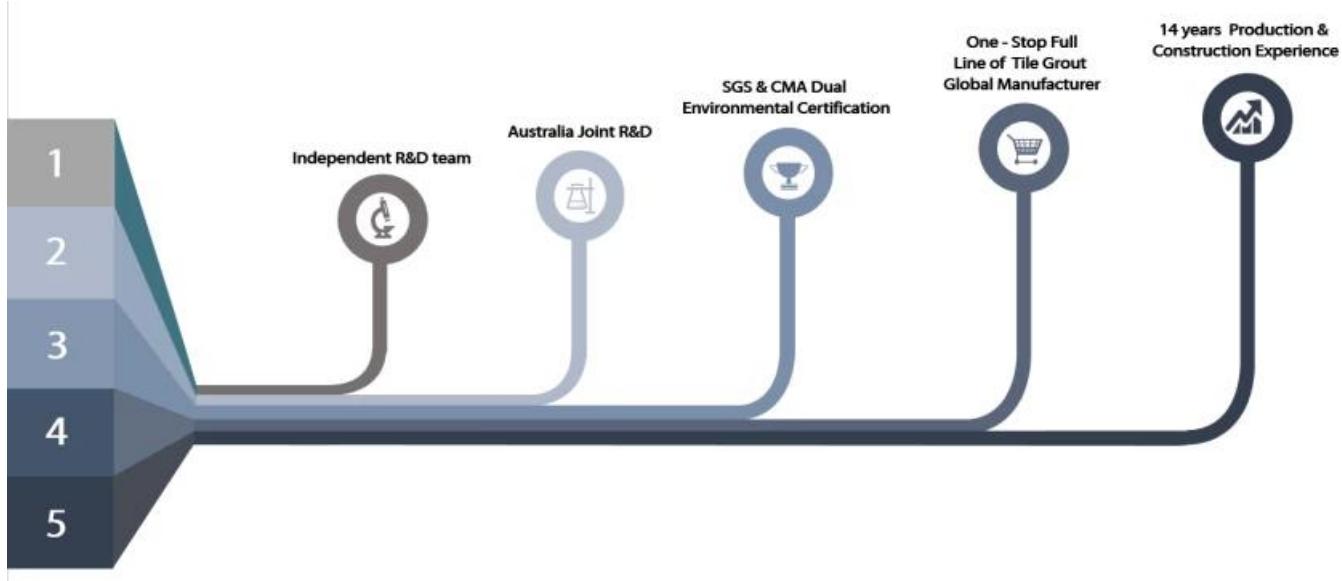

Fastocin masana'anta



Layin injin cream



Injin gwaji



Bayanin sarrafa batutuwa



Sanyi mai sanya



Cika layin injin



Mashin mai rufi



Kayan Kayan Kayan Gaskiya



Jari

Takardar shaida

